
STANDARDS & SPECIFICATION

The Armorduct Cable Basket range is available in depths of 35mm, 60mm, 110mm and 160mm in standard 3m lengths. Widths of 50mm - 900mm available as standard, with additional sizes on request. Quick fit couplers for rapid installation.

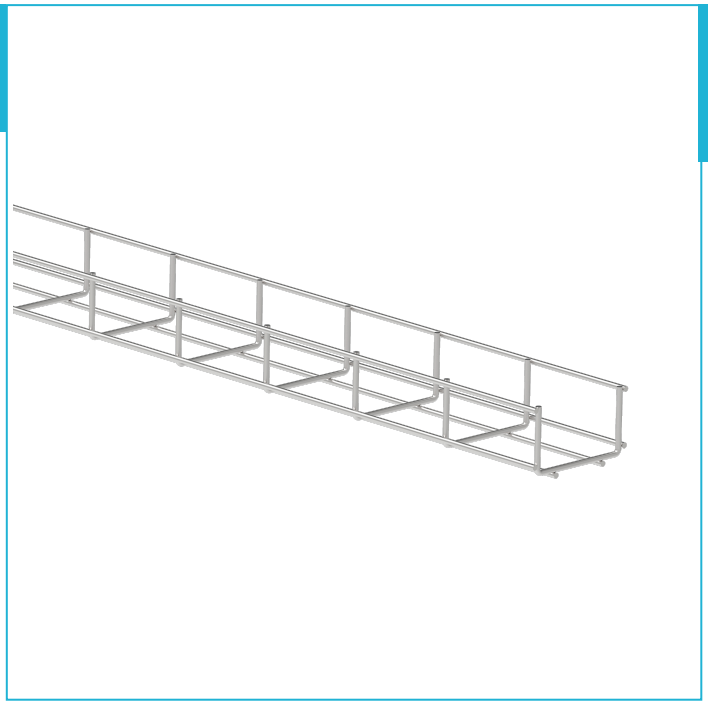

100mm x 60mm Bright Zinc Plate Cable Basket 3m

AM60.100/BZP

Product Standard	BS EN 61537: 2007
Material	BRIGHT ZINC PLATE
Finish	Self (PC & CPC Finishes Available)
Material Standard	ISO 16120-1:2017

* exact or representative image

- Quick fit couplers to be ordered separately
- 100mm x 50mm mesh configuration
- Zinc plated for enhanced appearance and corrosion protection, suitable for indoor environments

Compliance	UKCA / CE Low Voltage Directive 2014/35/EU The Electrical Equipment (Safety) Regulations 2016
Fire Rating	Tested to DIN 4102-12: 1998

LUL Accredited	
Ind. Weight (kg)	1.76
Embodied Carbon (kg CO2e per kg)	4.8576

EMBODIED CARBON AS SPECIFIED IN CIBSE TM65.1:2022 (A1-A3). To calculate total embodied carbon according to TM65 methodology, add A4 transport emissions to the A1–A3 cradle-to-gate total to get the full TM65 embodied carbon estimate for stages A1–A4.

Packaging Information:

EAN Number	5056854203697

Dimensions

Length (mm)	3000	**Dimension B (mm)**		**Dimension F (mm)**	
Width (mm)	100	**Dimension C (mm)**		**Length Wire Gauge**	3.5
Height (mm)	60	**Dimension D (mm)**		**Cross Wire Gauge**	3.5
Dimension A (mm)		**Dimension E (mm)**			

