Silhouette 125

- 18mm stylish ultra low profile grille
- Downstream airflow guide vanes for improved pressure development
- Designed for vertical or horizontal application
- Modern aesthetic with indication light
- IPX4 rated
- Suitable for wall, ceiling and panel mounting



Slimline Bathroom Ventilation

With a slim profile of only 18mm, Silhouette blends in with the wall surface to provide an unobtrusive installation. Silhouette has a FID performance of 160m³/h. Silhouette can be wall, ceiling or panel mounted and connected to an appropriate duct run to the outside.



Models

Silhouette 125B

Single speed 125mm, bathroom/toilet fan with indication light and back draught shutter.

Model	Stock Ref
B	445161

Silhouette 125T (Timer)

Single speed 125mm bathroom/toilet fan with integral adjustable electronic overrun timer (5-30 minutes), indication light and back draught shutter.

Model	Stock Ref
T	445162

Silhouette 125H (Humidistat)

Single speed 125mm bathroom/toilet fan with integral adjustable auto humidity sensor from 60-90% RH, indication light and back draught shutter.


Model	Stock Ref
H	445163

Accessories



Model	Stock Ref
Wall Kit	455226

Dimensions (mm)

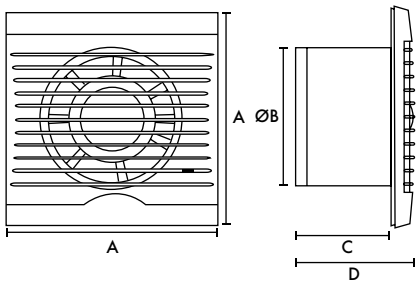

A	BØ	C	D
187	125	131	149

Performance Guide

	Extract Performance - FID			Sound dB(A)
Model	m^3/h	l/s	Watts	@ 3m
Silhouette 125B/T/H	160	45	20	40