Connection Boxes

CODE	DESCRIPTION	BOX QTY
FL-CBOX	CONNECTION BOX	1



Connectors - Nylon (12 Way)

Maximum continuous working temperature 110° (self extinguishing)


CODE	DESCRIPTION	PACK QTY
FL-NSC3	3 AMP	10
FL-NSC5	5 AMP	10
FL-NSC15	15 AMP	10
FL-NSC30	30 AMP	10
FL-NSC60	60 AMP	5



Connectors - Polyethylene (12 Way)

Maximum continuous working temperature over a short period 95° (Over a long period 80°)

CODE	DESCRIPTION	PACK QTY
FL-PSC3	3 AMP	10
FL-PSC5	5 AMP	10
FL-PSC15	15 AMP	10
FL-PSC30	30 AMP	10
FL-PSC60	60 AMP	5

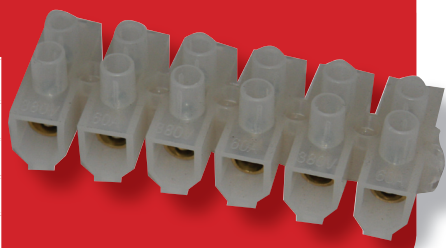

Connectors - Porcelain

CODE	DESCRIPTION	PACK QTY
FL-PORC5/1	5 AMP 1 POLE	20
FL-PORC5/2	5 AMP 2 POLE	20
FL-PORC5/3	5 AMP 3 POLE	20
FL-PORC15/1	15 AMP 1 POLE	20
FL-PORC15/2	15 AMP 2 POLE	20
FL-PORC15/3	15 AMP 3 POLE	20
FL-PORC30/1	30 AMP 1 POLE	20
FL-PORC30/2	30 AMP 2 POLE	20
FL-PORC30/3	30 AMP 3 POLE	20

