# DBR

## DIE-CAST IP65 BULKHEAD

The timeless classic design of DBR bulkheads make them suitable for virtually any general outdoor area lighting application. Available as a full diffuser or stylish eyelid version, both can be specified with integral emergency and photocell as options.



## Features

- Attractive classic design
- Robust IK10 die-cast aluminium housing and polycarbonate diffuser
- IP65 rating, suitable for exposed outdoor environments
- Integral 3 hour emergency operation
- Integral photocell for automatic dusk to dawn operation

## Specification

| Code | Description | Lumen Output | Emergency Lumen Output | Wattage | Efficacy |
|---|---|---|---|---|---|
| DBR18EPC | 18W DBR Bulkhead with Photocell & Emergency | 1400lm | 220 lm | 18W | 78 lm/W |

## Product Information

| | |
|---|---|
| **Warranty** | 5 Years |
| **Emergency Battery Warranty** | 3 Years |
| **On-Site Warranty** | 2 Years |
| **Colour Appearance (CCT)** | 4000K |
| **IP Rating** | IP65 |
| **IK Rating** | IK10 |
| **Emergency Battery Type** | LiFePO4 |
| **Voltage** | 220-240V |
| **Material (Body/Housing)** | Die-Cast Aluminium |

| | |
|---|---|
| **Colour Rendition (CRI)** | Ra >80 |
| **Colour Finish** | Black RAL9005 |
| **LED Life Expectancy** | L70B50 50,000 Hours |
| **Power Factor** | >0.9 |
| **Frequency** | 50/60Hz |
| **Driver Type** | Fixed Output |
| **Approval** | UKCA CE |
| **Electrical Class** | Class I |
| **Working Temperature** | -20°C to 45°C |

**Tel: 0114 279 8999** | **Email: sales@redarrowelectrical.co.uk** | redarrowelectrical.co.uk

**Red Arrow Electrical Ltd,** Cortonwood Drive, Brampton, Barnsley, S73 0UF

This document is uncontrolled if printed, all information is subject to change. Generated on 06/03/26

| | | | |
|---|---|---|---|
| **Material (Diffuser/Cover)** | Polycarbonate | **EM Working Temperature** | 0°C to 50°C |

OUTDOOR LIGHTING SPECIFICATION SHEET

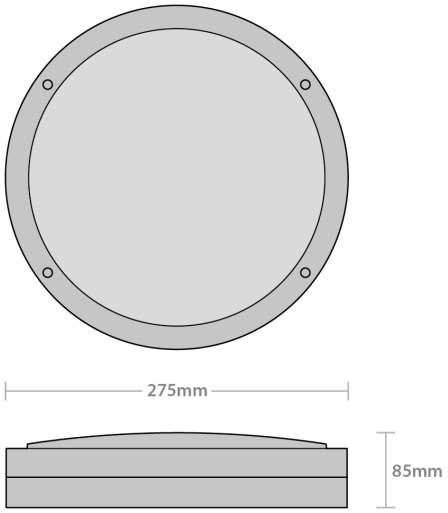
# DBR

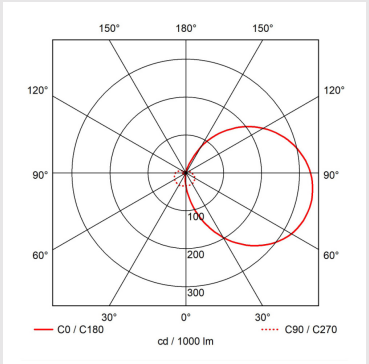
## DIE-CAST IP65 BULKHEAD

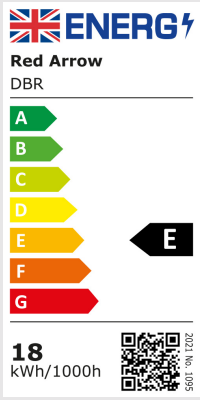
## Packaging Information

| | |
|---|---|
| **Dimensions (mm)** | Ø: 275 x D: 82 mm |
| **Product Net Weight (kg)** | 1.50 kg |
| **Barcode** | 5055807617048 |
| **Box Dimensions (mm)** | L: 280 x W: 280 x D: 90 mm |
| **Box Gross Weight (kg)** | 1.65 kg |

| | |
|---|---|
| **Units/Outer Carton** | 10 |
| **Outer Carton Barcode** | 5055807617048 |
| **Outer Carton Dimensions (mm)** | L: 480 x W: 300 x D: 590 mm |
| **Outer Carton Gross Weight (kg)** | 17.55 kg |




**Tel: 0114 279 8999** | **Email: sales@redarrowelectrical.co.uk** | redarrowelectrical.co.uk

**Red Arrow Electrical Ltd,** Cortonwood Drive, Brampton, Barnsley, S73 0UF

This document is uncontrolled if printed, all information is subject to change. Generated on 06/03/26