DBR

DIE-CAST IP65 BULKHEAD

The timeless classic design of DBR bulkheads make them suitable for virtually any general outdoor area lighting application. Available as a full diffuser or stylish eyelid version, both can be specified with integral emergency and photocell as options.





Features

- Attractive classic design
- Robust IK10 die-cast aluminium housing and polycarbonate diffuser
- IP65 rating, suitable for exposed outdoor environments
- Integral photocell for automatic dusk to dawn operation

Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
DBR18PC	18W DBR Bulkhead with Photocell	1400lm		18W	78 lm/W

Product Information

Warranty	5 Years
On-Site Warranty	2 Years
Colour Appearance (CCT)	4000K
IP Rating	IP65
IK Rating	IK10
Voltage	220-240V
Material (Body/Housing)	Die-Cast Aluminium
Material (Diffuser/Cover)	Polycarbonate
Colour Rendition (CRI)	Ra >80

Colour Finish	Black RAL9005
LED Life Expectancy	L70B50 50,000 Hours
Power Factor	>0.9
Frequency	50/60Hz
Driver Type	Fixed Output
Approval	UKCA CE
Electrical Class	Class I
Working Temperature	-20°C to 45°C

Tel: 0114 279 8999 | **Email: sales@redarrowelectrical.co.uk** | redarrowelectrical.co.uk

Red Arrow Electrical Ltd, Cortonwood Drive, Brampton, Barnsley, S73 0UF

This document is uncontrolled if printed, all information is subject to change. Generated on 06/03/26


DBR


DIE-CAST IP65 BULKHEAD


Packaging Information

Dimensions (mm)	Ø: 275 x D: 82 mm
Product Net Weight (kg)	1.35 kg
Barcode	5055807617055
Box Dimensions (mm)	L: 280 x W: 280 x D: 90 mm
Box Gross Weight (kg)	1.5 kg

Units/Outer Carton	10
Outer Carton Barcode	5055807617055
Outer Carton Dimensions (mm)	L: 480 x W: 300 x D: 590 mm
Outer Carton Gross Weight (kg)	16.05 kg

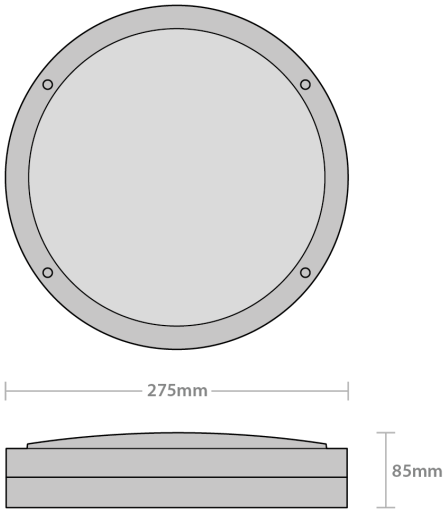

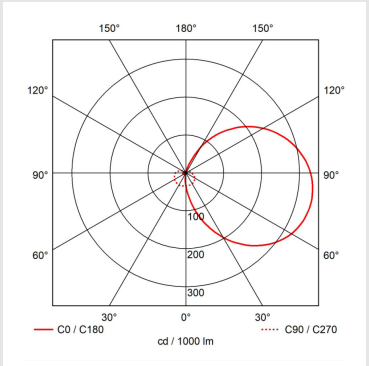

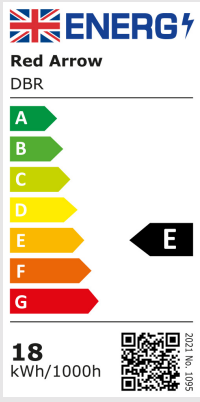

This document is uncontrolled if printed, all information is subject to change. Generated on 06/03/26