DATASHEET

Hamilton®
making connections beautifully

Code: LEDITB100


LED Dimmer Modules | Dimmers | 100W LED Dimmers

Product Image

NO IMAGE

Wiring

Dimensions

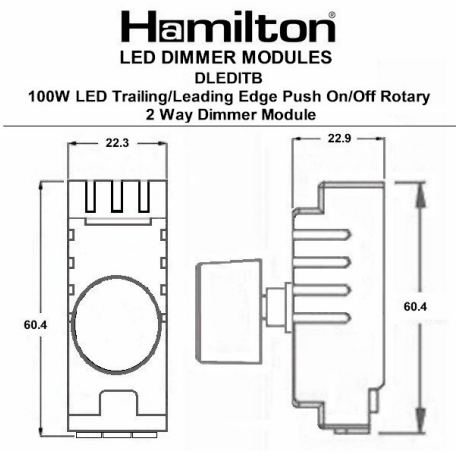

Insert Type	1 gang 100W LED Trailing/Leading Edge Push On/Off Rotary 2 Way Dimmer Module
Insert Colour	White
Plate Finish	N/A
EAN13 Barcode	5017504088804
Commodity Code	85365005
Luckins TSI	403422861
ETIM Class	EC000025
Dimensions(Nominal)	Module: Height = Width = Depth =
Weight	43 GR
Switched Poles	Single
Current Rating	0.4 Amp
Voltage	230V-240V
Maximum Load	5-100W
Mains Frequency	50Hz
IP Rating	IP2XD
Terminal Capacity 1	2X1mm²
Terminal Capacity 2	2X1.5mm²
Earth Terminal Capacity 1	5x1mm²
Earth Terminal Capacity 2	4X1.5mm²
Earth Terminal Capacity 3	3X2.5mm²
Earth Terminal Capacity 4	1X4mm² Multi-Strand
Earth Terminal Capacity 5	1X6mm²
Product Class 1	Face plate must be earthed
Ambient Operating Temperature	-5°C to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS EN 60669-2-1
Additional Notes	Trailing Edge & Leading Edge Dimmer

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ
T: +44 (0)1747 860088
E: info@hamilton-litestat.com | **W:** www.hamilton-litestat.com
(WEB)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 19/02/2025 E&OE