PRESCOR B AND SB SAFETY VALVES


For protecting water heaters and potable water systems.

- In accordance with PED 2014/68/EU and EN 12516-3.

Prescor B

- Min./Max. working temperature: 0 °C / 95 °C.
- Peak load: 140 °C.



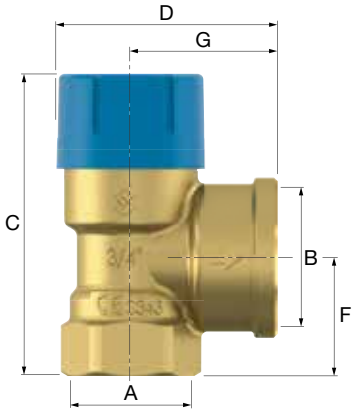

Type	Set pressure [bar]	Connection A	Connection B	Dimensions C [mm]	Dimensions D [mm]	Dimensions F [mm]	Dimensions G [mm]	Capacity [kW]		Order Code
Prescor B 1/2	6.0	Rp 1/2"	Rp 1/2"	68.7	47.2	21.5	28.5	75	50	27100
Prescor B 1/2	7.0	Rp 1/2"	Rp 1/2"	68.7	47.2	21.5	28.5	75	50	27103
Prescor B 1/2	8.0	Rp 1/2"	Rp 1/2"	68.7	47.2	21.5	28.5	75	50	27101
Prescor B 1/2	10.0	Rp 1/2"	Rp 1/2"	68.7	47.2	21.5	28.5	75	50	27102
Prescor B 1/2	6.0	Rp 1/2"	Rp 3/4"	74.7	53.2	26.5	34.5	75	50	27106
Prescor B 1/2	8.0	Rp 1/2"	Rp 3/4"	74.7	53.2	26.5	34.5	75	50	27107
Prescor B 1/2	10.0	Rp 1/2"	Rp 3/4"	74.7	53.2	26.5	34.5	75	50	27108
Prescor B 3/4	6.0	Rp 3/4"	Rp 1"	76.8	55.2	29.5	36.5	150	40	27110
Prescor B 3/4	7.0	Rp 3/4"	Rp 3/4"	70.9	49.2	23.5	30.5	150	40	28233
Prescor B 3/4	8.0	Rp 3/4"	Rp 1"	76.8	55.2	29.5	36.5	150	40	27111
Prescor B 3/4	10.0	Rp 3/4"	Rp 1"	76.8	55.2	29.5	36.5	150	40	27112
Prescor B 1	6.0	Rp 1"	Rp 1 1/4"	100.5	73.2	36.0	47.0	250	16	29005
Prescor B 1	7.0	Rp 1"	Rp 1 1/4"	100.5	73.2	36.0	47.0	250	16	28993
Prescor B 1	8.0	Rp 1"	Rp 1 1/4"	100.5	73.2	36.0	47.0	250	16	29006
Prescor B 1	10.0	Rp 1"	Rp 1 1/4"	100.5	73.2	36.0	47.0	250	16	29007
Prescor B 1/2 M x K 15	6.0	R 1/2"	K 15	81.2	60.5	37.0	42.0	75	40	28283
Prescor B 1/2 M x K 15	9.0	R 1/2"	K 15	81.2	60.5	37.0	42.0	75	40	28281
Prescor B 1/2 M x K 15	10.0	R 1/2"	K 15	81.2	60.5	37.0	42.0	75	40	28282

We reserve the right to change designs and technical specifications of our products.