

Type MW2 - Multiwedge 2

Designed for the Multideck MD60 and Multideck MD80 profiles manufactured by Kingspan®.

UK CA CE Fire Rated

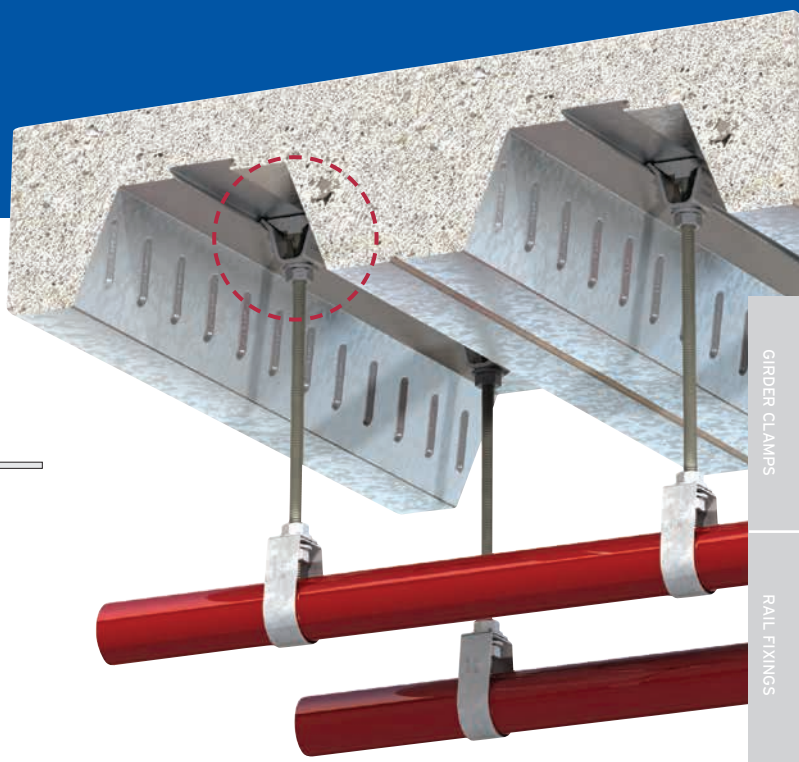

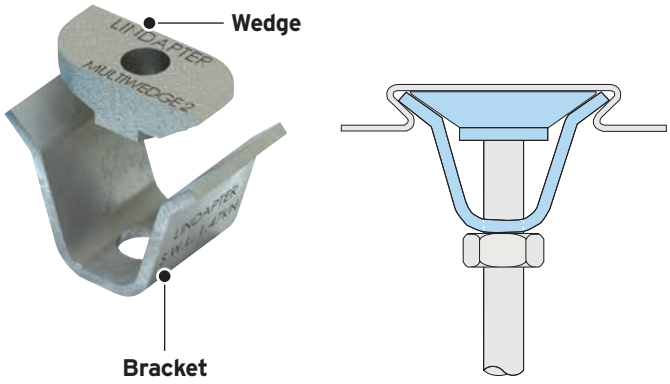

UK CA CE **For Characteristic Resistances when designing a connection to Eurocode 3, refer to DoP No.019 (CE) or DoP No.119 (UKCA) on Lindapter's website or request a DoP Brochure.**




Bracket: Pre-galvanised strip. **Wedge:** Malleable iron, zinc plated.

Product Code	Rod min 4.6	Safe Working Load (FOS 3:1) Tensile / 1 Rod kN	Tightening Torque Nm
MW06	M6	1.47	10
MW08	M8	1.47	10
MW10	M10	1.47	10

For fire ratings refer to www.Lindapter.com

How to install...

Watch the installation video at www.Lindapter.com

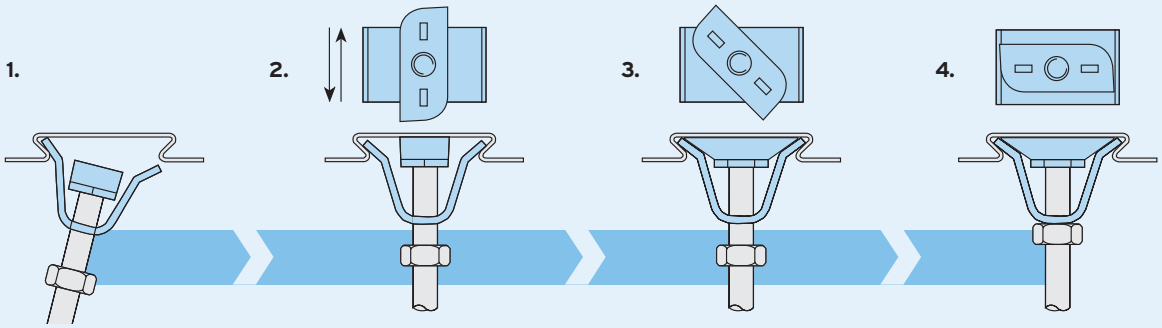

1) Pre-assemble the bracket and wedge (flat surface facing up) onto the threaded rod and insert one side of the bracket into the re-entrant channel of the decking.
2) Click the other leg of the bracket into position inside the decking and slide the assembly to the desired position along the length of the re-entrant channel.
3) Push and turn the wedge clockwise until it locks into the channel walls.
4) Tighten the hexagon nut beneath the assembly to the tightening torque specified in the table above.

- **Install the decking fixings after the concrete has been poured and has reached full strength.**
- **If the decking profile is deformed or distorted, do not install the fixing. If in doubt, contact the Technical Support team for advice.**
- **Although the Type MW2 is similar in appearance to Type MF (p. 66), it should NOT be used in profiles manufactured by CMF®.**

© Lindapter International 2023


Compatible Profiles

Lindapter has developed an extensive range of UKCA and CE Marked fixings to ensure optimum compatibility with all major decking profiles. They have been independently fire tested in accordance with BS EN 1991-1-2 and are fire rated up to 90 minutes. For further details please contact Lindapter.

Components


Lindapter Decking Fixing	Compatible Composite Decking Profile(s)
Type COM page 64 Fire Rated	
Type TR60 page 65 Fire Rated	
Type MF page 66 Fire Rated	
Type MW2 - Multiwedge 2 page 67 Fire Rated	
Type AW - Alphawedge page 68 Fire Rated	
Type AMD page 69	
Type SD2 - Slimdek 2 page 70	
Type VN page 71	


Tata Steel
ComFlor® 60, ComFlor® 80 and ComFlor® 95







SMD®
TR60+™ and TR80+™



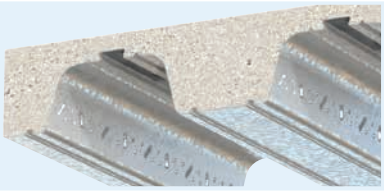



Construction Metal Forming (CMF®)
MetFloor® 60 and MetFloor® 80



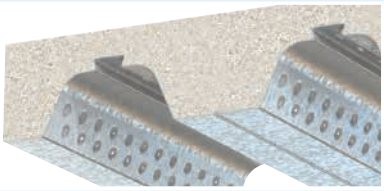



Kingspan®
Multideck MD60 and Multideck MD80



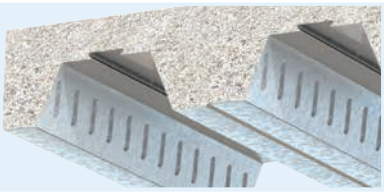


Richard Lees Decking (owned by William Hare)
Ribdeck E60



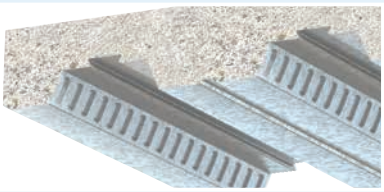


AMDECK®
AMDECK® 60 and AMDECK® 80



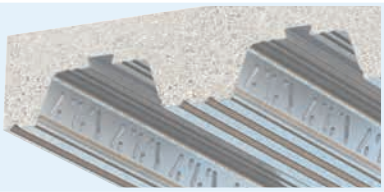

Tata Steel
ComFlor® 225





Fits several profiles including:
AMDECK® 54 (AMDECK®), R51+™ (SMD®), ComFlor® 51+ (Tata Steel), Holorib (Richard Lees Decking), Superib (Richard Lees Decking), Multideck MD50 (Kingspan®) and MetFloor® 55 (CMF®)



© Lindapter International 2023