Flexible Waste Fittings and Non-Return Valves

Flexible Connector offers maximum flexibility when conventional fittings cannot be used


- Maximum effective length 18"
- PVC Plain spigot to suit Multifit and universal compression outlet traps or waste fittings. Also suitable for solvent welding to pipe BS EN 1329-1:2000
- Universal compression outlet connection



1¼" Code	1½" Code	2" Code
FLEXCON1	**FLEXCON2**	-

Flexible Connector offers maximum flexibility when conventional fittings cannot be used


- Maximum effective length 18"
- Universal compression connection x 1½" BSP coupling nut

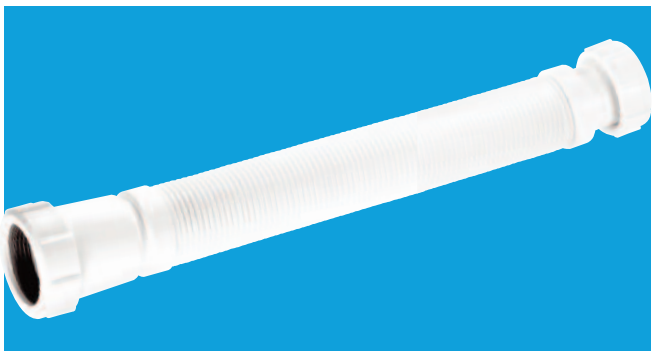

-	**FLEXCON2-LN**	-

Flexible Fittings

- These fittings offer complete flexibility for any required angle or offset

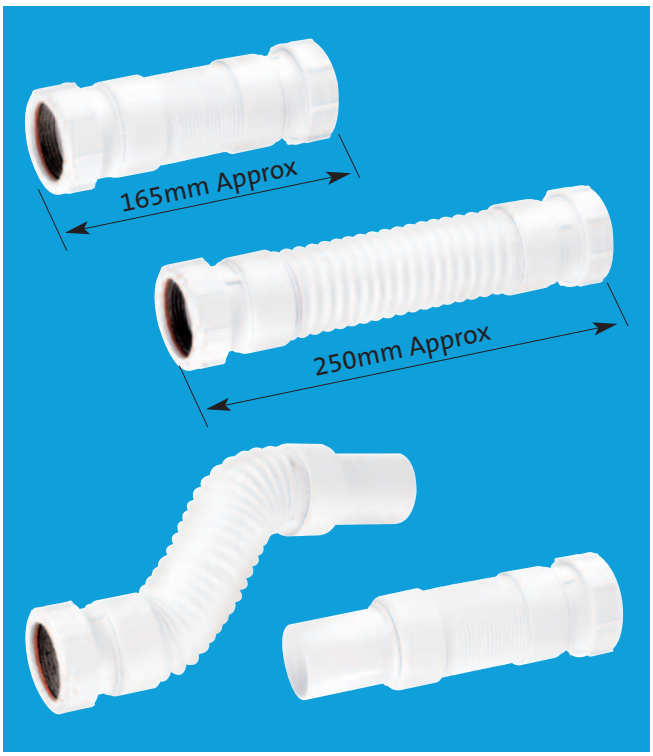


1¼" Code	1½" Code	2" Code

Universal Compression Connection x Universal Compression Connection

FLEXCON3	**FLEXCON4**	**FLEXCON7**


Universal Compression Connection x PVC Plain Spigot suitable for solvent welding to pipe BS EN 1329-1:2000

FLEXCON5	**FLEXCON6**	**FLEXCON8**

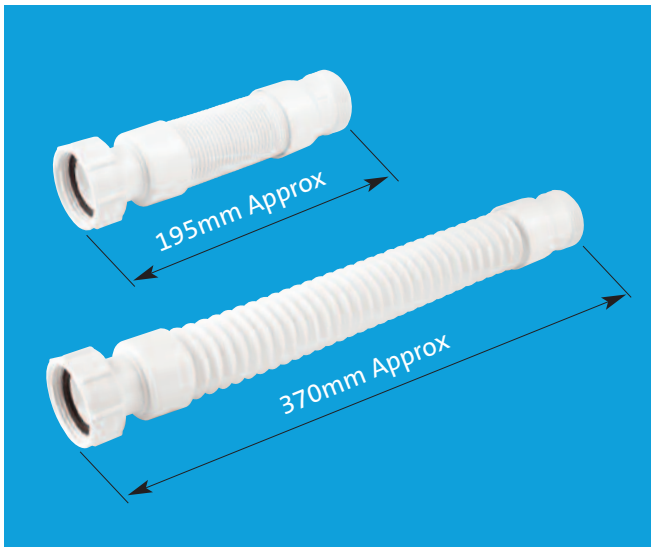

1¼" BSP coupling nut x 1¼" BSP male thread

Code	FLEX-JKS

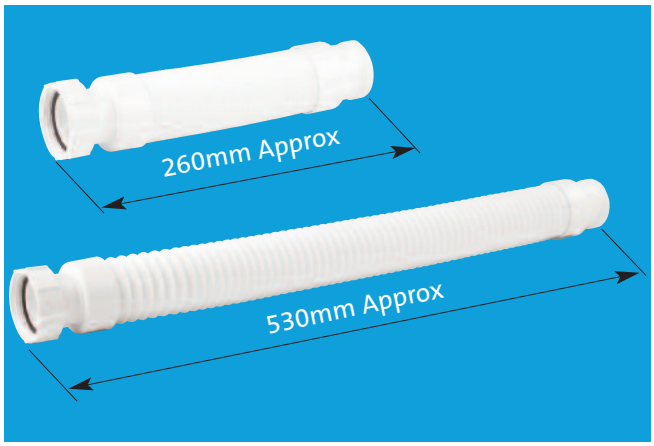

1½" BSP coupling nut x 1½" BSP male thread

Code	FLEXCON9

Non-Return Valves



1¼" Code	1½" Code	2" Code
In-Line Non-Return Valve with 1½" universal compression connections and top access for cleaning		
S28M-NRV	**T28M-NRV**	-




In-Line Non-Return Valve with 2" universal compression connections and top access for cleaning		
-	-	**Z28M-NRV**



In-Line Non-Return Valve with 2" BS EN 1329-1:2000 solvent weld connections and top access for cleaning		
-	-	**Z28M-NRVS**

- The above Non-Return Valves are designed to prevent a back flow of water and must be installed in a horizontal position. They must only be used when there is no alternative and on the basis that they are cleaned regularly

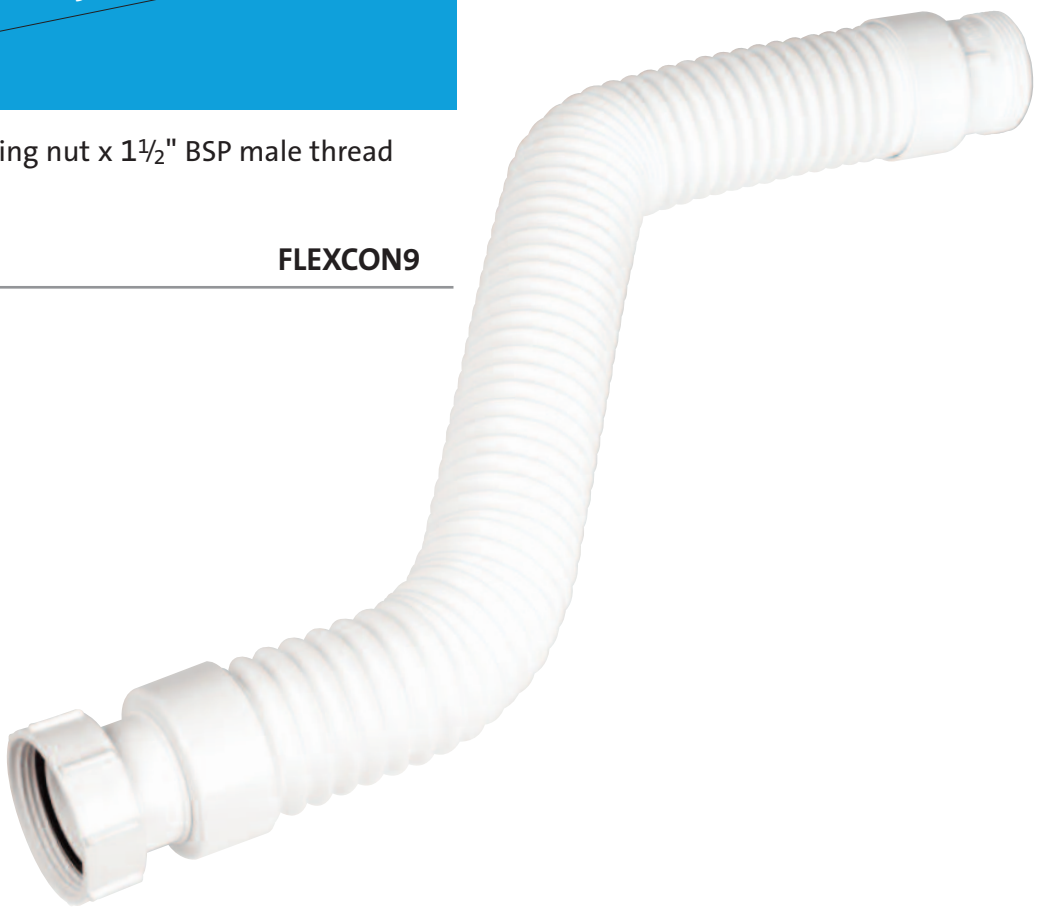

FLEXCON9