Conex | Bänninger

>B< Press Inox





>B< Press Inox is an innovative stainless steel press system which is quick and simple to install providing a more secure fitting.

Features and Benefits:

- >B< Profile 3 point press* ensures a leak free, secure and permanent joint.
- >B< Press Inox is quick and simple to install, saving time and money.
- Flame free, no need for hot works and ensures on site safety.
- Available from 15mm - 54mm.
- >B< Press Inox has a high quality O-ring material that forms a secure leak free joint when pressed.
- Leading edge design ensures the chances of damaging the O-rings are reduced during assembly.
- Compatible with various press tools and jaws.
- Designed with a mechanical hexagonal press form which indicates the fitting has been secured and ensures no joint rotation.

*Please see compatibility list on website for more details

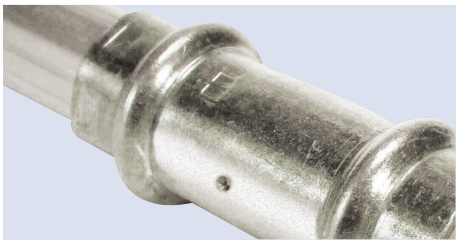

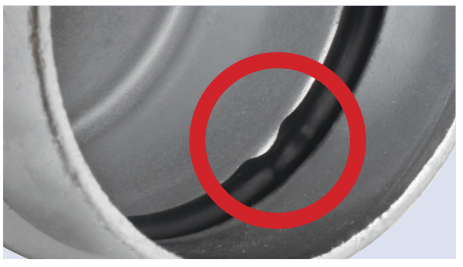

Conex | Bänninger

>B< Press Inox


>B< Press Inox range with Pressing Indicator

Straight Coupler



PS5270
From: 15mm
To: 54mm

Slip Coupler



PS4275
From: 15mm
To: 54mm

Fitting Reducer



PS5243
From: 22 x 15mm
To: 54 x 42mm

Straight Coupler with Male Thread



PS424G
From: 15 x 1/2"
To: 54 x 2"

Straight Coupler with Female Thread



PS4270G
From: 15mm x 1/2"
To: 54 x 2"

Short Cross Over




PS5087
From: 15mm
To: 54mm

90° Street Bend



PS5002
From: 15mm
To: 54mm

Male Street Bend



PS5030
From: 15mm
To: 54mm

45° Obtuse Elbow



PS5041
From: 15mm
To: 54mm

45° Obtuse Street Elbow



PS5040
From: 15mm
To: 54mm

Bend with Male Thread



PS4001G
From: 12mm
To: 28mm

Bend with Female Thread



PS4090
From: 15mm x 1/2"
To: 54mm x 2"

Tee Equal



PS5130
From: 15mm
To: 54mm

Tee Reduced End



PS4130G
From: 15 x 1/2" x 15mm
To: 54 x 2" x 54mm

Stop End



PS5301
From: 15mm
To: 54mm

- Specially designed EPDM O-Ring making >B< Press Inox suitable for HVAC, hot and cold drinking water applications.
- Available in sizes 15mm to 54mm
- >B< Press Inox tube system available using precision steel tubes according to EN 10312.
- Designed for hydrostatic water pressure up to 16 bar.
- Designed for temperature ranges of -35°C to 110°C.
- Fully tested and approved by WRAS, DVGW and KIWA.
- Full system available with approved >B< Inox tubes. System guarantee is 10 years.
- Fittings guarantee is 5 years when used with tubes in accordance with EN 10312. Series 1 and Series 2.

*Conex|Bänninger products are approved by numerous Standards Authorities and Certification Bodies. For more details on this product range, please email our technical team at: technical@ibpgroup.com.

Conex Universal Limited: Global House, 95 Vantage Point, The Pensnett Estate, Kingswinford, West Midlands DY6 7FT, UNITED KINGDOM.
Tel: +44 (0)121 557 2831 | Fax: +44 (0)121 557 0185 | Email: sales@ibpgroup.com | Website: www.conexbanninger.com

This is a representation of the full range from Conex Universal. IBP trade marks are registered in numerous countries.

CB/UK/06.15