inta

technical data sheet

time flow - Non Concussive Basin Mounted Tap with Adjustable Temperature Control

non concussive operation with manual adjustment

Introduction

The Non Concussive basin mounted tap with Adjustable Temperature control is designed for use with the Inta range of Thermostatic Mixing Valves. The tap is operated by manually pressing the control knob, the non concussive action automatically closes the tap after approximately 15 seconds. Rotating the control knob clockwise or anti-clockwise reduces or increases the mixed water temperature.



non concussive basin mounted manual mixer tap NC230CP

- Non Concussive operation
- Manual temperature adjustment
- Operating pressure range of 0.5 to 5 bar (dynamic)
- Flow Time = 15 seconds ±3 seconds


Product Range


Description	Code
Non concussive basin mounted tap with adjustable temperature control	NC230CP

AIRFIELD INDUSTRIAL ESTATE, HIXON, STAFFORD, ST18 0PF
T. 01889 272180 F. 01889 272181 E. SALES@INTATEC.CO.UK

time flow - Non Concussive Basin Mounted Tap with Adjustable Temperature Control

NC230CP

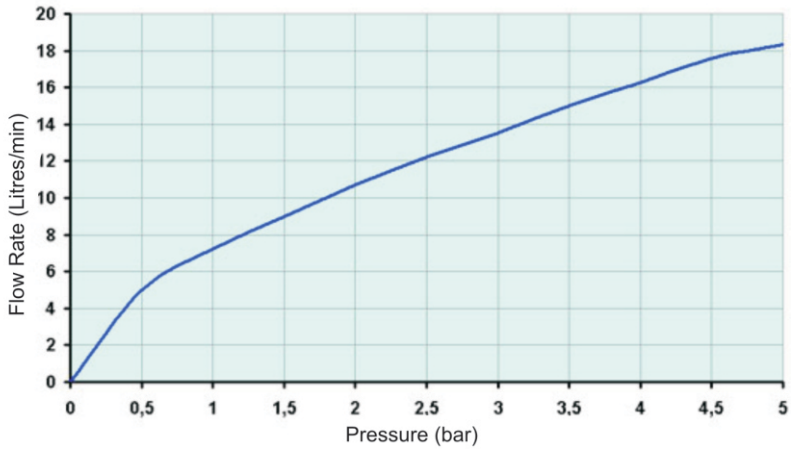

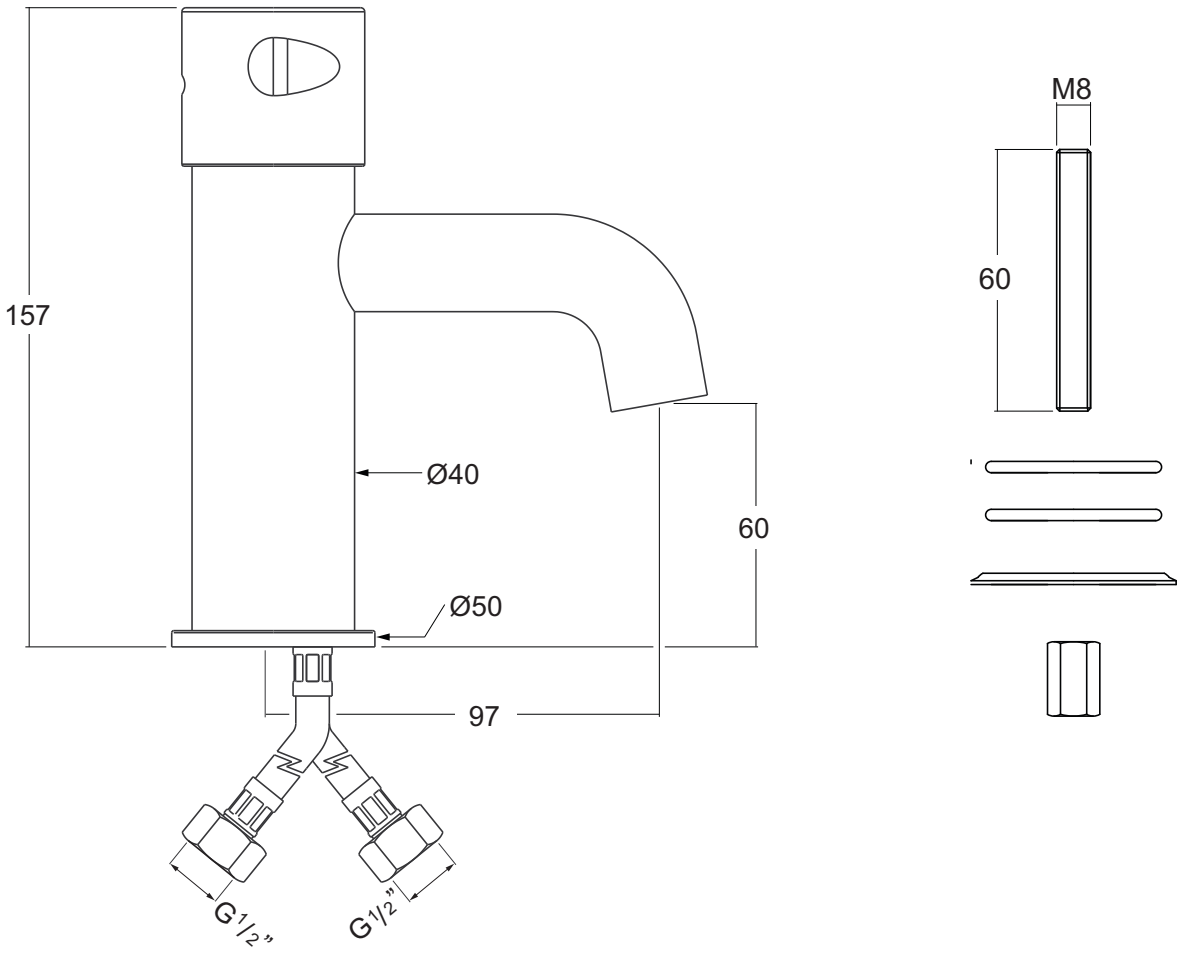

Technical Specification

Max Inlet Pressure (static)	5 Bar
Min Inlet Pressure (dynamic)	0.5 Bar
Max Basin Thickness	45mm
Inlet Connections	G1/2" flexible tail
Timed Flow At 1 Bar	15 seconds ± 3 seconds

AIRFIELD INDUSTRIAL ESTATE, HIXON, STAFFORD, ST18 0PF
T. 01889 272180 F. 01889 272181 E. SALES@INTATEC.CO.UK